



INFRARED SAUNA JI090A


Specifications and assembly instructions

SPECIFICATIONS




Model	Ji090A
Dimensions	900x900x1900 mm
Number of persons	1
Wood	Hemlock, 45 mm
Glass	Transparent, tempered, 8 mm
Hinges	Zinc Alloy
Control	Control panel with buttons
Operating time	Up to 90 min
Temperature	Up to 65 °C
Ventilation	No
Connectivity	USB, Bluetooth, Radio, App
Lighting	LED RGB strip
Heaters	1450 W
Connection	Euro socket 230 V, 50 Hz, 16 A fuse
Weight	152 kg

COMPONENTS

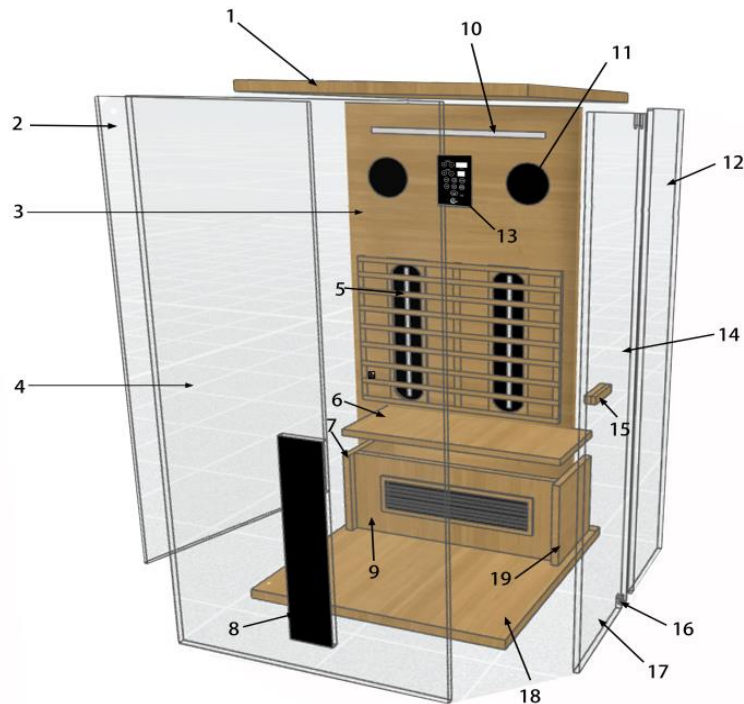

- | | |
|-------------------------------------|-----------------------------|
| 1 Ceiling | 11 Speaker |
| 2 Left glass panel | 12 Right Side glass panel |
| 3 Back panel | 13 Control Panel |
| 4 Front glass panel | 14 Door sealing strip |
| 5 Full-spectrum heater (back panel) | 15 Door handle |
| 6 Bench | 16 Door hinge |
| 7 Left side bench support | 17 Glass Door |
| 8 Front full-spectrum heater | 18 Bottom panel |
| 9 Bench support | 19 Right side bench support |
| 10 LED RGB Strip light | |

RECOMMENDED TOOLS

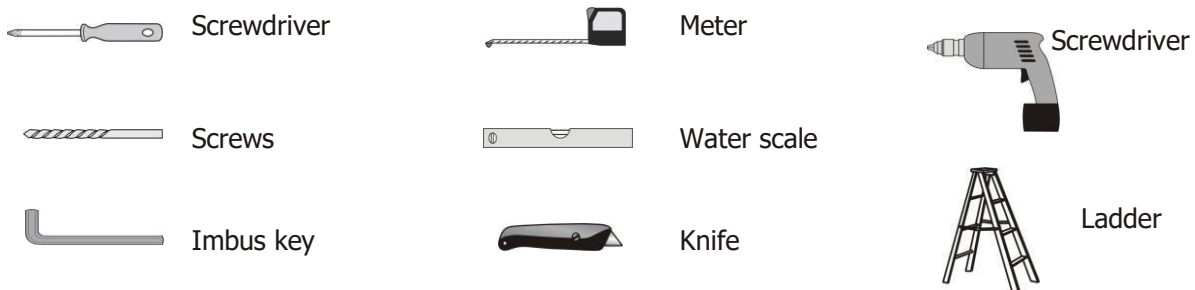


ASSEMBLY TIPS

Please remove the transport packaging and check if your infrared sauna has been delivered complete and undamaged before the start of assembly. At least two people are needed to assemble the sauna. Please be careful with handling the glass during the installation process!



ASSEMBLY STEPS

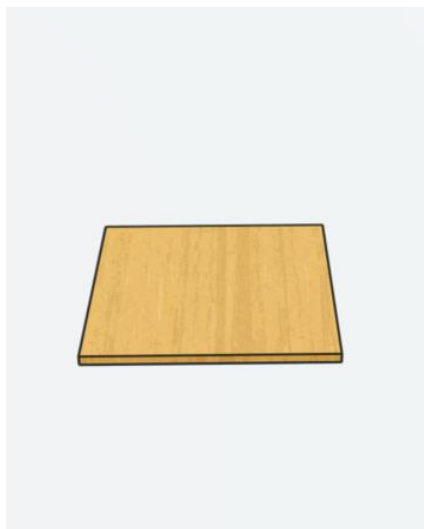

1. Bottom



2. Back panel



3. Left Bench Support



4. Right Bench Support



5. Bench Support




6. Bench



7. Left Glass Panel



8. Right Side glass panel

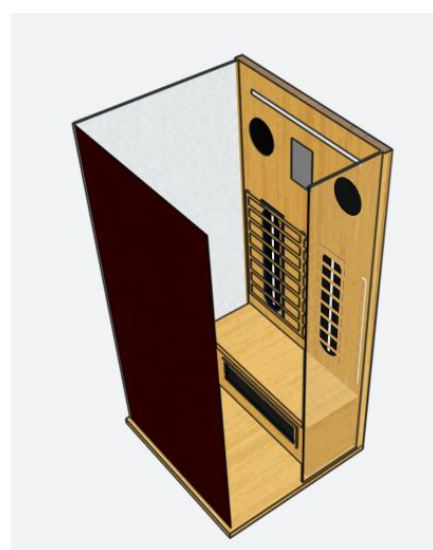

9. Front glass panel






11. Ceiling



12. Glass door



13. Front full spectrum heater

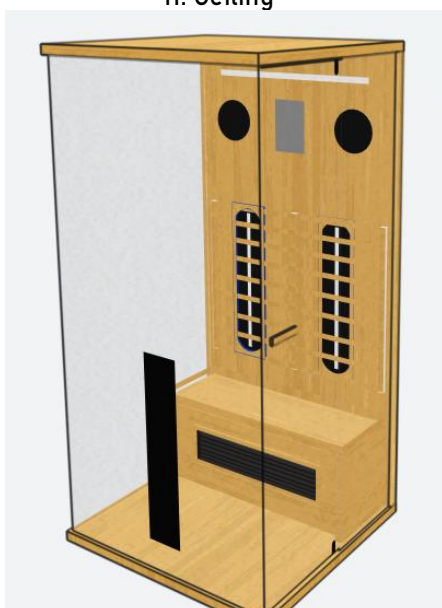

14. Door handle

Connecting electrical components



1. Plug the bottom connecting cable into the control unit.






2. Connect the Bench Support's cable to the control unit.



3. Connect the Front Full spectrum heater's cable into the bottom panel.

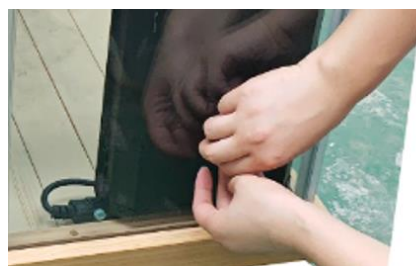

4. Fix the front full-spectrum heater with screws to the front glass.

Installation of bench, bench support, hinges, handle, and cover



1. Screw the left and right bench supports to the back panel, respectively, with screws.



2. Place the front bench support, then fasten it with screws on both sides.






3. Insert the left-side glass into the slot of the rear panel, then press the 90-degree plastic strip onto the other side of the glass.



4. Insert the front glass(8) and right side glass panel(9) into the 90-degree plastic strips, respectively. Then place the top panel level on the upper frame and fasten it using screws.

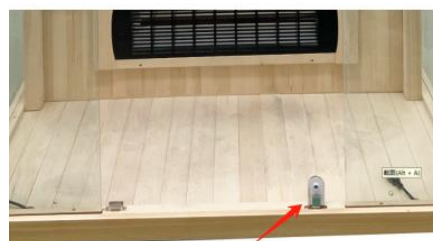

5. Insert the glass clamps into the slots of both the top and bottom panels.



6. Align the holes on the door glass with the glass clamps and secure with screws. Install the door holder clip to the corresponding position of the door stopper.



7. After glass installation, secure the provided wooden strips to the interior top and bottom of the frame using screws, ensuring tight contact between the strips, glass, and frame surfaces.





8. Tighten the screws and install the door handle.

SMARTPHONE APP:

You can also conveniently control your heating cabin via the app on your smartphone. To do this, download the App from the App Store or Google Play, scan the following QR Codes with your smartphone.
(Note: Please use this APP within 10 meters)



App Store



Google Play

